

Product Options

Roll goods and interlocking tiles are available standard in an 8 millimeter thickness. Custom thicknesses and tiles options are also available.



8mm x 48" (1.2m)
6mm x 48" (1.2m) *
9mm x 48" (1.2m) *



8mm x 23" (58cm) x 23" (58cm)*
8mm x 24" (61cm) x 24" (61cm)*



8mm x 36" (91cm) x 36" (91cm)*

*For all custom options, please contact your local representative to determine availability, pricing, minimums, and lead times.

Physical Data


PERFORMANCE CRITERIA

TEST

RESULT

Tensile Strength	ASTM D412	200 lb/in ² min.
Flexibility	ASTM F137	Pass 1/4-inch mandrel
Static Load (1000 lb/in ²)	ASTM F970	Less than 0.020-inches
Coefficient of Friction	ASTM 2047	Greater than 0.9-inches
Thermal Conductivity	ASTM C518	0.406 BTU-in/hr-ft ² -°F
Ambient Noise Reduction	ASTM C423	0.10 Sabin/ft ²
Impact Insulation Class	ASTM E492	45 Minimum
Sound Transmission Coefficient	ASTM 413	45 Minimum
Ball Rebound	EN 12235	Pass
FloorScore	CA Specification 01350	Certified

Can a floor be the original, timeless, and recycled all at the same time?

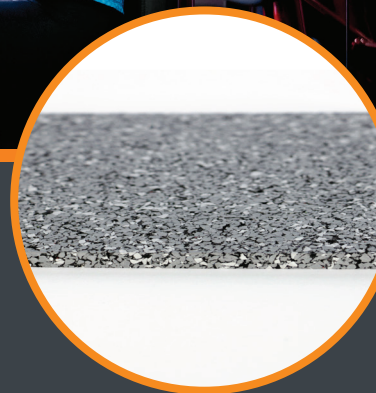

Yes.

Everlast Basic Rolls and Tiles

are the "original" recycled rubber fitness floor. Available in rolls and tiles, this durable surface sets the standard for performance, quality, and affordability.

ecore[™]

Built by Yes.



What does it take to be a floor?

- ✓ Durable
- ✓ Sustainable
- ✓ Affordable
- ✓ Ease of Maintenance
- ✓ Slip Resistant

This basic fitness floor is the product of Ecore's vertically integrated manufacturing capability. Turning the durability and performance of a tire into a floor, Ecore takes pride in transforming waste into an industry.



Can a floor do more? Yes.

Ecore Athletic products provide good ergonomics, safety and acoustic benefits.

Applications



Cardio



Light Weights



Ice Rinks



Strength Equipment

